
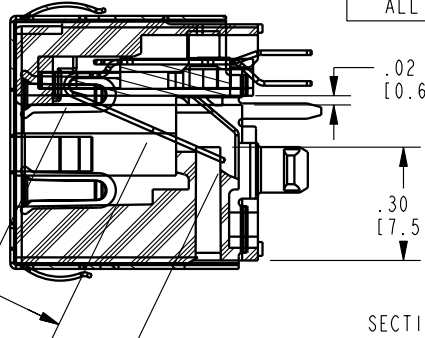
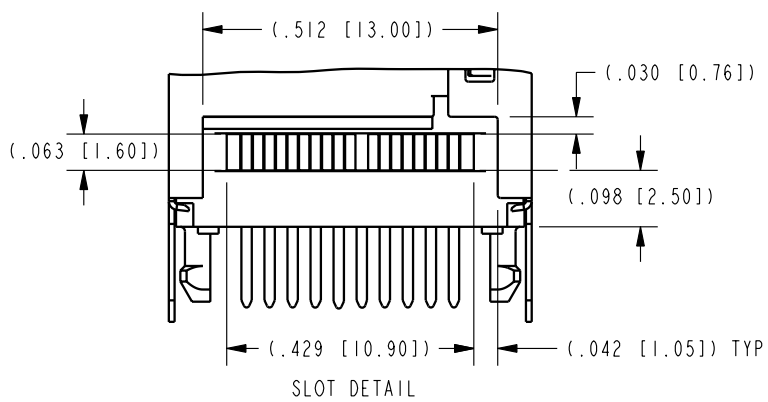
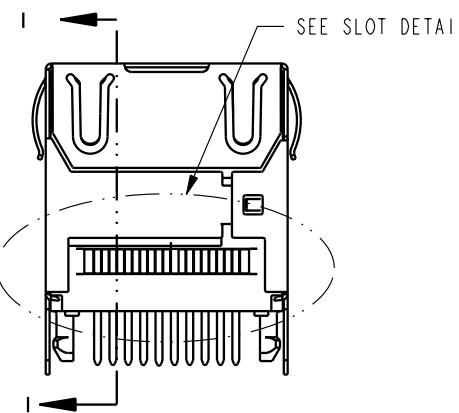
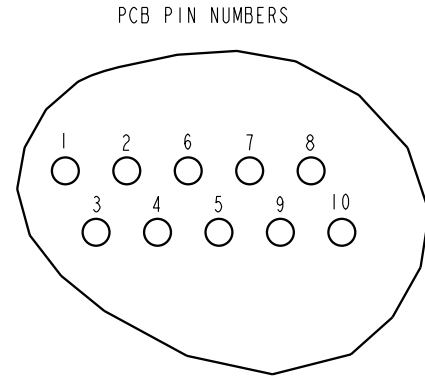
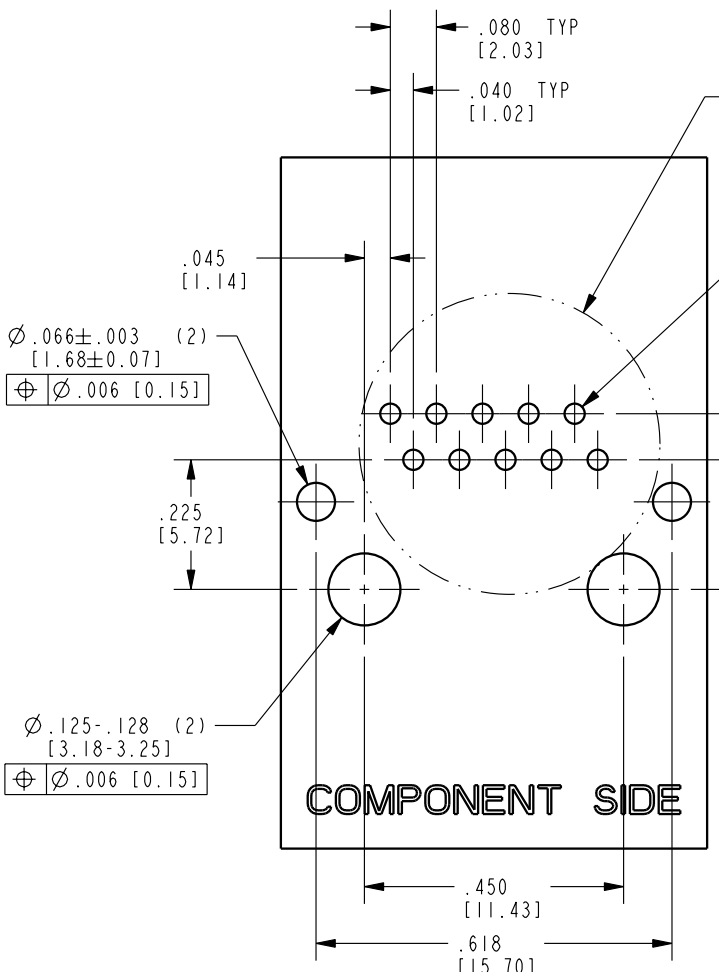

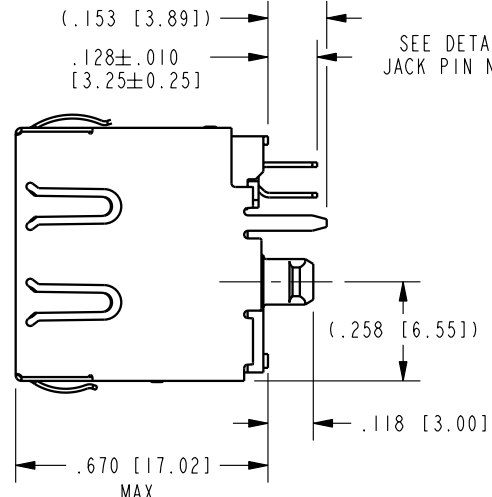
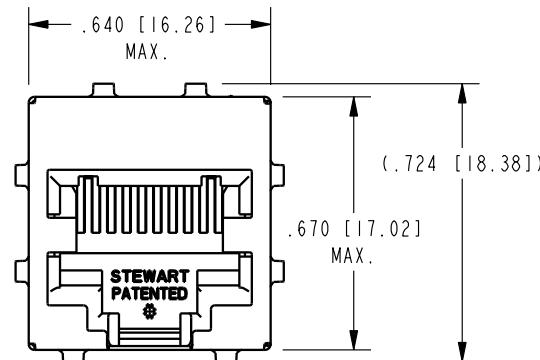
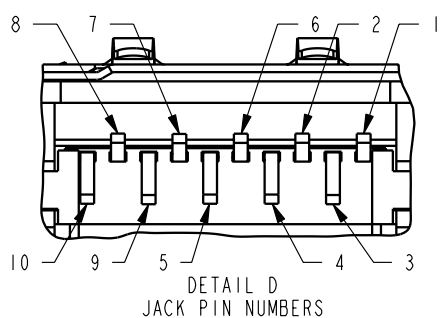





DATE	REV.	ECN	APP'D BY
2-9-16	A3	10531	TRM
3-17-17	A4	10938	TRM

B

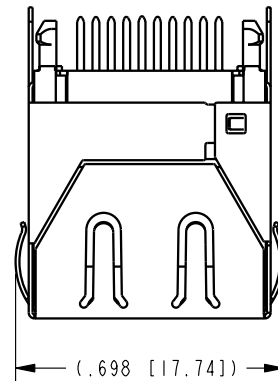

- NOTES:
- 1. CONNECTOR MATERIALS:
HOUSING: THERMOPLASTIC UL94 V-0
CONTACTS/SHIELD: COPPER ALLOY
NOMINAL YIELD STRENGTH OF CONTACT MATERIAL= 110 KSI [760 N/mm²]
 - 2. SHIELD PLATING: NICKEL
CONTACT PLATING: SELECTIVE GOLD IN CONTACT AREA
GOLD FLASH ON REMAINING TAIL
SEE CHART FOR PART NUMBER
 - 3. PRODUCT DESIGNED FOR CATEGORY 6 APPLICATIONS
 - 4. DIMENSIONS AND TOLERANCES COMPLY WITH TIA-1096 STANDARD.
 - 5. REFERENCE PRODUCT SPECIFICATION PR026-01

A

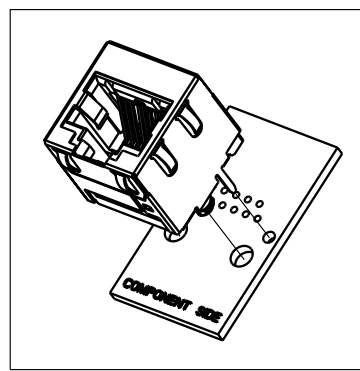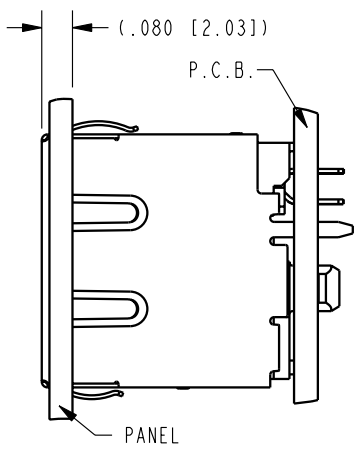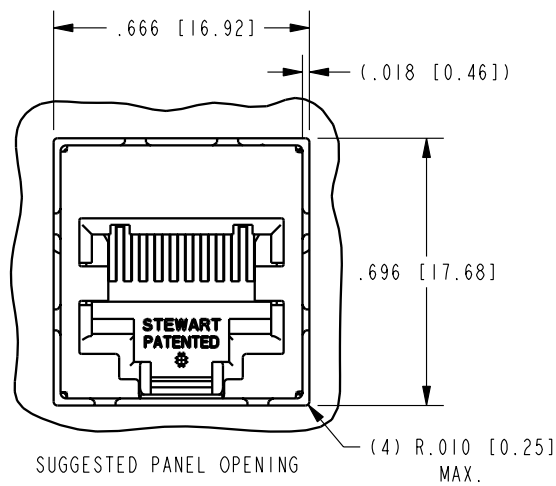

50 MICRO-INCHES [1.27um]	SS-60000-039
CONTACT PLATING IN MATING AREA	PART NUMBER

THIRD ANGLE PROJECTION
DO NOT SCALE DRAWING
DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS: INCHES [METRIC]
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ±1°
SHEET NO. 1 OF 1

11118 Susquehanna Trail South
Glen Rock, PA 17327-9199
(717) 235-7512
<http://www.stewartconnector.com>

CAT 6 SHIELDED VERTICAL JACK, 10 PIN ASSEMBLY
W/PG GROUND TABS, & CUSTOM SLOT FEATURE

DRN BY:	DHG	DATE	3-28-11
APPD BY:	TRM	DATE	3-28-11
DWG. NO.	CT600099	REV.	A4