

SPECIFICATIONS

Modular Jack

Mechanical

Mating Force: 4.0Pounds max.

Unmating Force: 4.0Pounds max.

Durability: 1000 Cycles

Electrical

Current Rating: 1.5A max.

Dielectric Withstanding Voltage: 1500VAC


Physical

Housing: UL 94V-0, Cool Grey 5C PBT, Glass




Contact: Phosphor bronze

Operating Temperature: -40 to +85

JM Series
RJ11,1X1,6P2C
T/D,T/H,

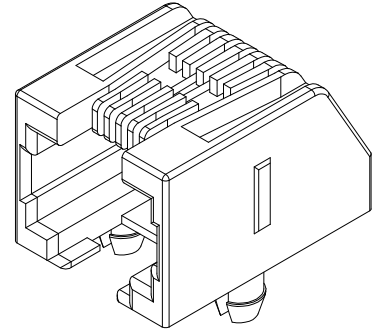

DRAWING

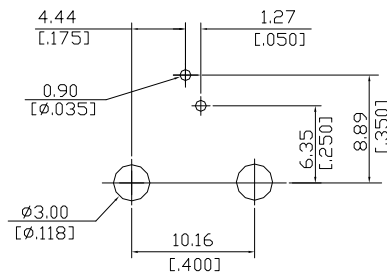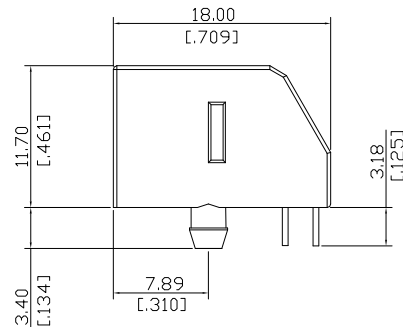

RECOMMENDED PCB LAYOUT
SCALE 2:1

ORDERING INFORMATION

PRODUCT NO.: JM 1 6 6 1 1 - KA04 - 4 F

SERIES PREFIX:

JM=MODULAR JACK

BODY & TERMINATION:

1=R/A ALL PLASTIC T/H

Design TYPE:

6=WITHOUT/TOP & SIDE PANEL-GND,

POS. TYPE:

6=6P2C

NO. of Body:

1=Single Port

LEAD FREE CODE:

F=LEAD-FREE

PACKAGE TYPE:

4=SOFT TRAY

HOUSING COLOR:

KA04=COOL GREY 5C

CONTACT PLATING:

1=6u" GOLD PLATING