

SPECIFICATIONS

Mechanical

Mating Force: 4Pounds Max.

Unmating Force: 4Pounds Max.

Durability: 1000 Cycles

Electrical

Current Rating: 1.5A Max.

Voltage Rating: 150 VAC

Dielectric Withstanding Voltage: 1000V Contact To Contact
1500V Contact To Shield

Physical

Housing: Thermoplastic, UL 94V-0 Rated In Black Color

Contact: Copper Alloy

Shell: Copper Alloy

Operating Temperature: 0 to +70


Modular Jack

JM Series


RJ45 1*1

R/A, T/H Type

1.02mm [.040"] Pitch



DRAWING

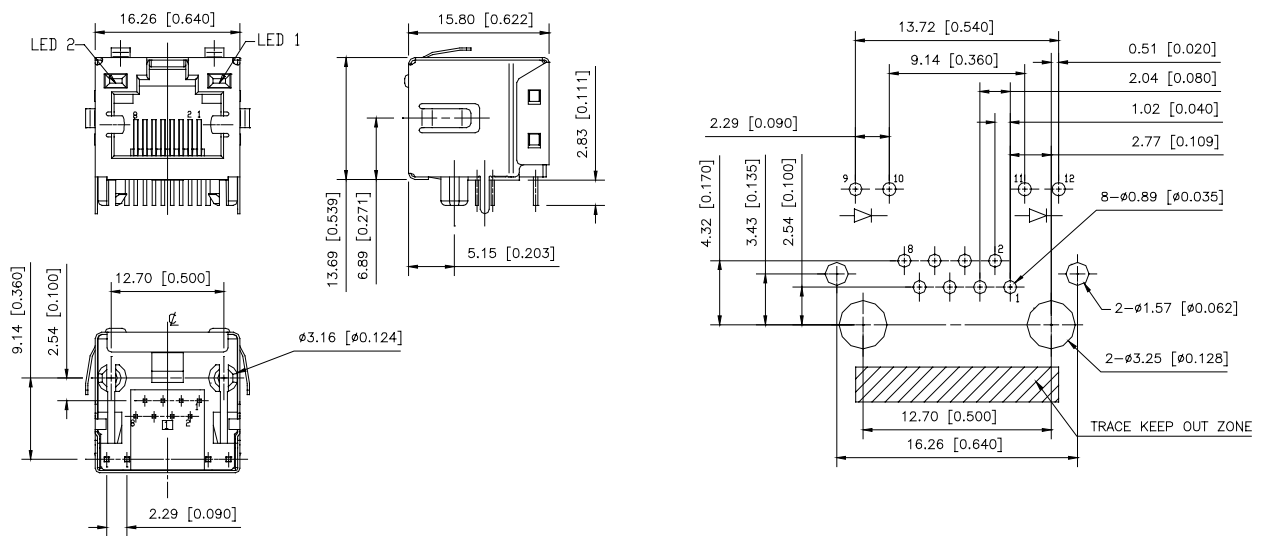

ORDERING INFORMATION

PRODUCT NO.: JM 3 7 1 1 5 - L1

L1 = LED COLOR

YELLOW AND GREEN

GOLD PLATING THICKNESS
5 = 50u"

1 = SINGLE PORT

1 = 8P8C

7 = W/ TOP & SIDE PANEL-GND, W/ BOARD-LOCK

3 = R/A, ALL SHIELDED, T/H

JM = MODULE JACK

P/N	LED 2 9 ϕ 10	LED 2 11 ϕ 12
	JM37115-L1 YELLOW 	GREEN