

SPECIFICATIONS

Mechanical

Mating Force: 3.50Kg (7.71Lb) max.

Unmating Force: 1.00Kg (2.20Lb) min.

Durability: 1500 Cycles

Electrical

Current Rating: 1.5A

Contact Resistance: 30mΩ max.

Dielectric Withstanding Voltage: 500V AC/1min min.

Insulation Resistance: 1000MΩ min.

Physical

Housing: Thermoplastic, UL 94V-0 rated

Contact: Copper alloy


Shell: Steel

Plating: See "ORDERING INFORMATION"



Operating Temperature: -55 °C to +85 °C

USB Connector

UB Series
Up right, T/H
4 Pos.



DRAWING

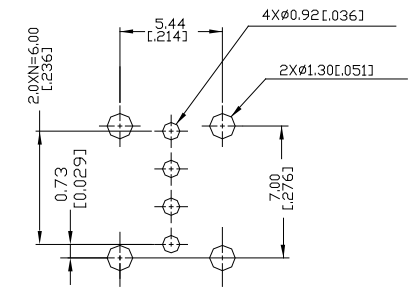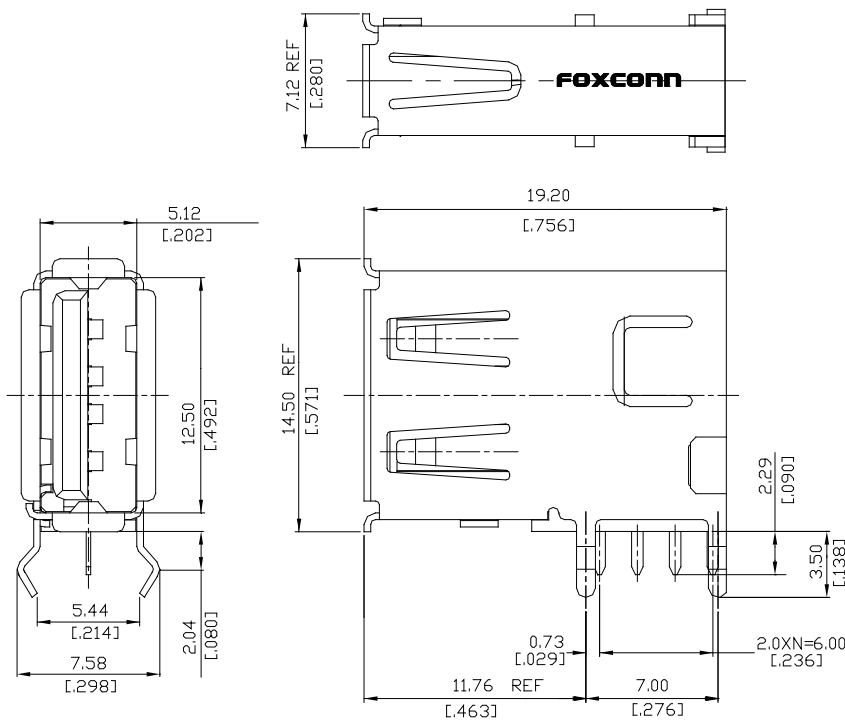

ORDERING INFORMATION

PRODUCT NO: UB 3 1 1 9 C - 4HDB - 4 F

USB Series

Terminator Type

3= UP RIGHT

Contact Design Type

1=Female

NO. of Pos

1=4 Pos

Lead Free

Package Code

4=Tray Packing

Extension Code

Contact Area Plating

C=30u" Pd/Ni+Gold Flash

Profile Height