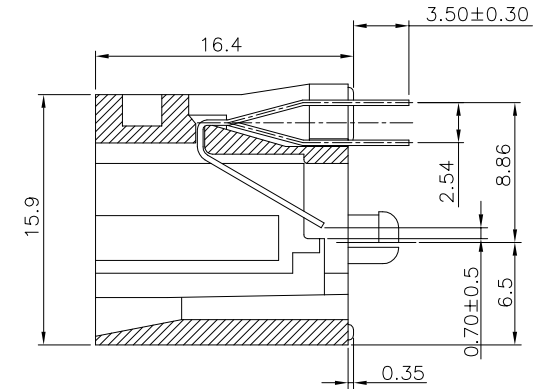
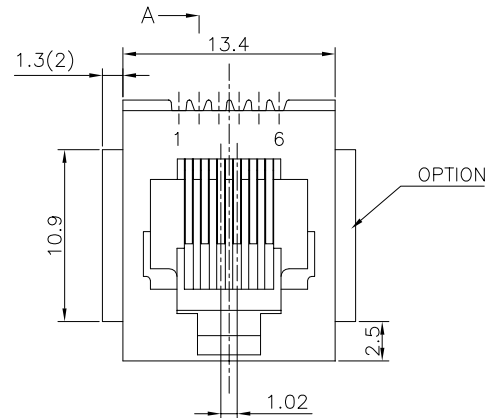


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

**NOTES:****ELECTRICAL:**

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT+15%GF UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: 0°C TO 70°C.
3. WAVE SOLDERING TEMPERATURE: 230~250°C (3~5SECONDS)

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

CUL FILE NO. E163191

PART NUMBER: E526X-YOLXXX-L


NO. OF CONTACT: _____
2- 2C
4- 4C
6- 6C

1- 3u" 2- 6u"
3-15u" 4-30u"
5-50u"


COLOR OF HOUSING: _____

0- BLACK
4- GRAY
6- WHITE

3- W/ PANEL STOP
4- W/O PANEL STOP

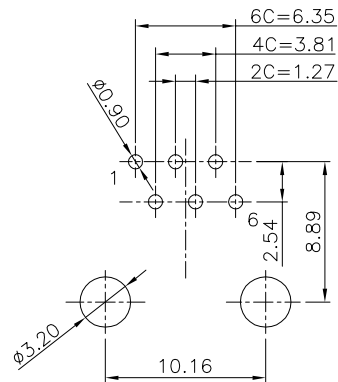

PC Board Layout Component Side Shown
THICKNESS=1.6mm

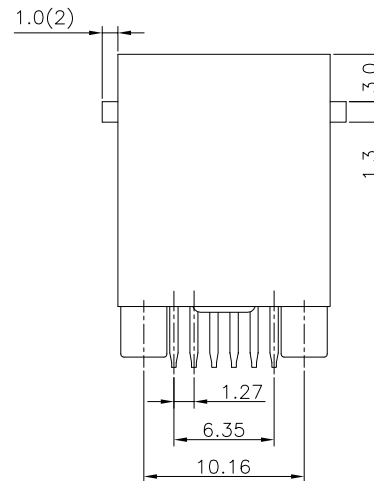

DETACHED LISTS	MM (INCH)	DFTO CXQ	DATE 06/11/05	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
		MFO	DATE		
	MM	APPL	XLF	DATE 06/15/05	TITLE
	.0 ± 0.2 ±	MATERIAL :			TOP ENTRY JACK (6P)
ANGLES ± 0.5		QT'Y :		DRAWING NO. GE523A48-LC	SIZE REV
THIRD ANGLE PROJECTION		FINISH :		/PART NO. SEE NOTE	A3 0
		SCALE : 3 : 1		DO NOT SCALE DRAWING	SHEET 1 OF 1