

SPECIFICATIONS

Modular Jack

Mechanical

Mating Force: 4.5Pounds max.(RJ45) 7.88Pounds max.(USB)
Unmating Force: 4.5Pounds max.(RJ45) 2.25Pounds min.(USB)
Durability: 1000 Cycles(RJ45) 1500 Cycles(USB)


Electrical

Current Rating: 0.5A max.(RJ45) 1.0A(USB)
Dielectric Withstanding Voltage: 1000V(RJ45) 500V(USB)


Physical

Housing: Thermoplastic, UL 94V-0 rated in Black Color
Contact: Copper Alloy
Shell: Copper Alloy
Operating Temperature: 0℃ to +70℃

JFM Series
RJ45 Over Dual USB
R/A, T/H Type
1.27mm [.050"] Pitch
10/100 Base-T

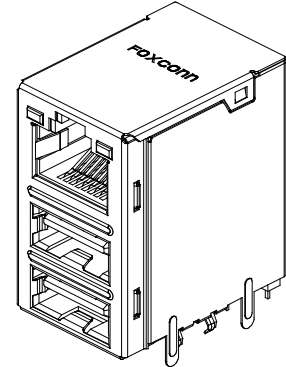

DRAWING

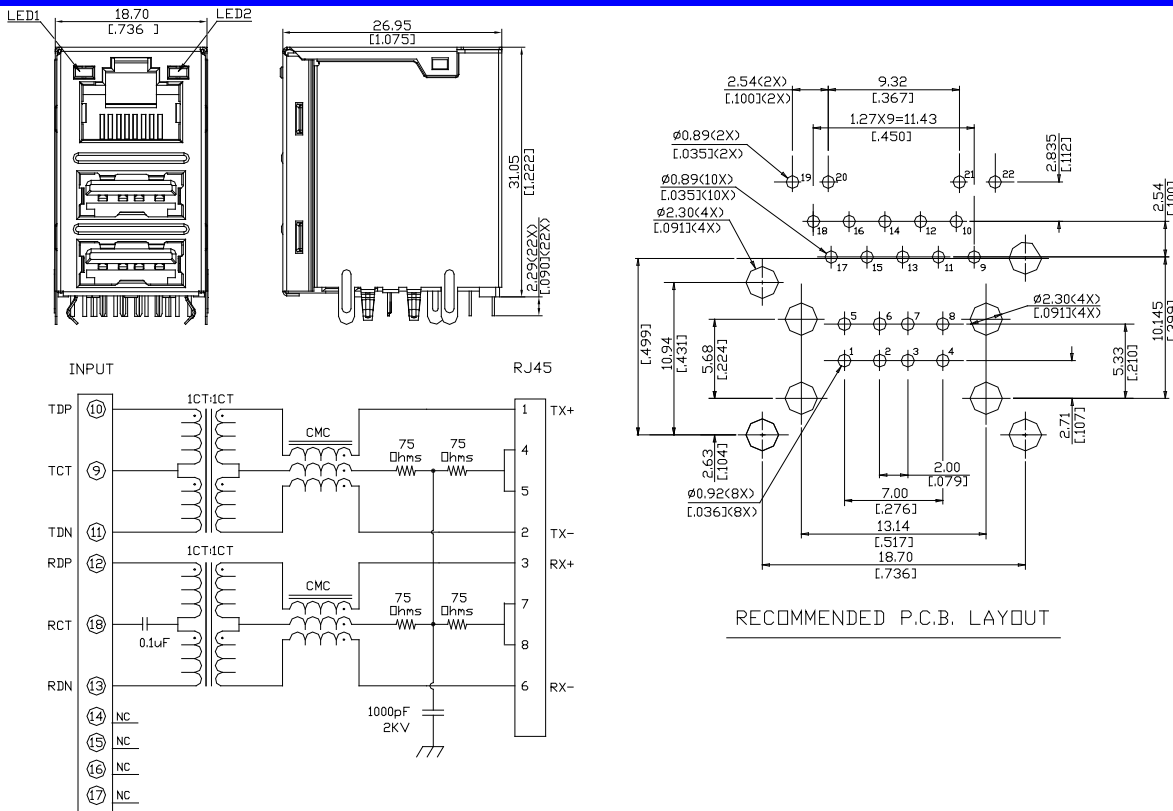

ORDERING INFORMATION

PRODUCT NO.: JFM 2 4 U 1 * - 7108 - 4 F

RJ With Magnetic: _____
 Protocol Type: _____
 2=10/100 Base T
 Core Count: _____
 4=4Core
 Configuration: _____
 U=Combo USB
 PCB Attach Method: _____
 1= Solder Tail

Material Of Plating: _____
 F: Lead Free
 4: Soft Tray
 Extension Code _____
 LEDs (See Sheet) _____

JFM24U1N-7108-4F	19	GREEN	20	21	GREEN	22
JFM24U1H-7108-4F	19	ORANGE	20	21	GREEN	22
JFM24U1G-7108-4F	19	YELLOW	20	21	GREEN	22
JFM24U1F-7108-4F	19	GREEN	20	21	ORANGE	22
JFM24U1B-7108-4F	19	GREEN	20	21	YELLOW	22
JFM24U1A-7108-4F	19	GREEN	20	21	YELLOW	22
JFM24U14-7108-4F	19	YELLOW	20	21	YELLOW	22
JFM24U13-7108-4F	19	GREEN	20	21	YELLOW	22
JFM24U12-7108-4F	19	GREEN	20	21	GREEN	22
JFM24U11-7108-4F	19	YELLOW	20	21	GREEN	22
JFM24U10-7108-4F	NONE			NONE		
PRODUCT NO.	LED1			LED2		