

SPECIFICATIONS

Mechanical

Mating Force: 4 Pounds Max.

Unmating Force: 4 Pounds Max.

Durability: 1000 Cycles

Electrical

Current Rating: 1.5A Max.

Voltage Rating: 150 VAC

Dielectric Withstanding Voltage: 1000V Contact To Contact
1500V Contact To Shield

Physical

Housing: Thermoplastic, UL 94V-0 Rated In Black Color

Contact: Copper Alloy

Shell: Copper Alloy

Operating Temperature: 0 °C To +70 °C

Modular Jack


JM Series

RJ45 T/H CONNECTOR


R/A T/U Type

W/O LED

1.02mm [.040"] Pitch



DRAWING

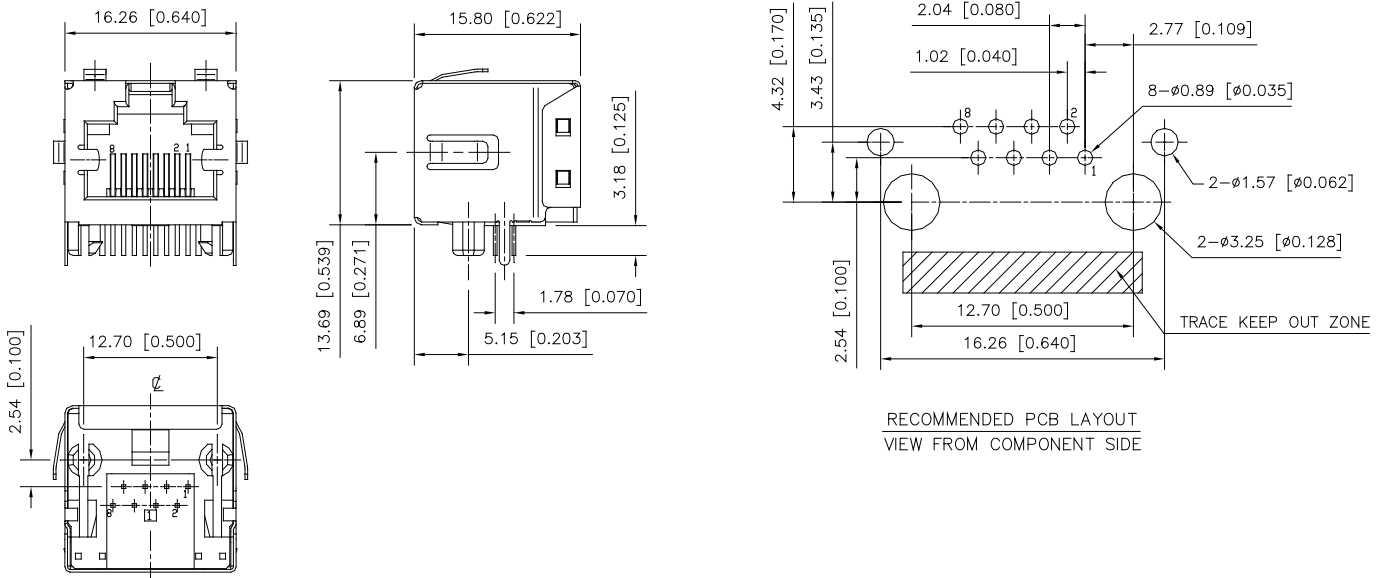

ORDERING INFORMATION

PRODUCT NO.: JM 3 7 1 1 1 - L0FF - 4 F

F = LEAD FREE
 4 = SOFT TRAY
 EXTENSION DODE
 L0FF = W/O LED
 GOLD PLATING THICKNESS
 1 = GOLD FLASH
 NO. OF PORT
 1 = SINGLE PORT
 POSITION TYPE
 1 = 8P8C
 DESIGN TYPE
 7 = W/ TOP & SIDE PANEL-GND, W/ BOARD-LOCK
 BODY&TERMINATION
 3 = R/A, ALL SHIELDED, T/H
 SERIES PREFIX
 JM = MODULE JACK