

SPECIFICATIONS

Electrical

Rating: 1A max. per contact

Voltage: 530V AC

LLCR: 50mΩ max at 10mA.

Insulation Resistance: 500MΩ min. in initial at 500V DC

Vibration: 1us max.

Mechanical

Normal Force: 50gf min.

Durability: 5000 times mating & unmating cycles.


Physical

Operating Temperatures: -55℃ to +85℃


Package: 1000PCS/Reel, 10 Reels/Package

I/O CONN.

**I/O 18 PIN CONN. 3.0mm
Height, 0.5mm PITCH
SMT Type.**



DRAWING

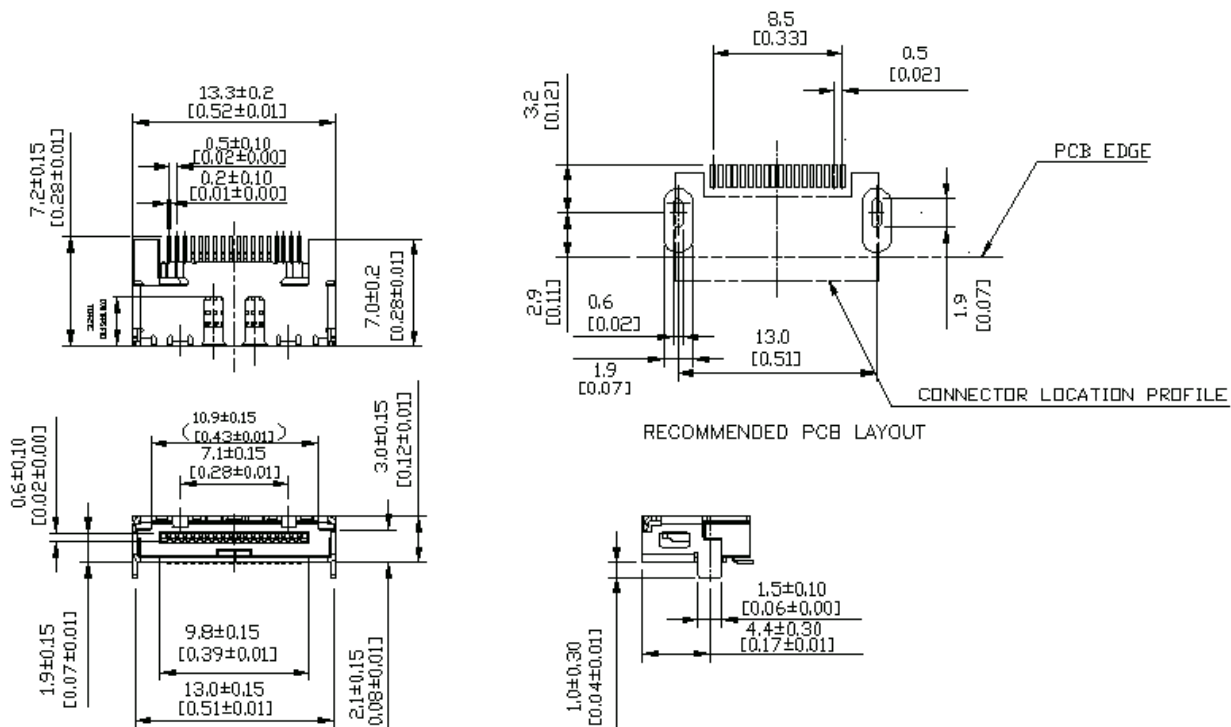

ORDERING INFORMATION

PRODUCT NO: QS 1 0 1 8 7 - E 01 - TR

IO conn.	_____	Tape & Reel
Receptade	_____	Extention Code
W/O design	_____	Running Number
18 pos	_____	NEC
15u''golds	_____	