
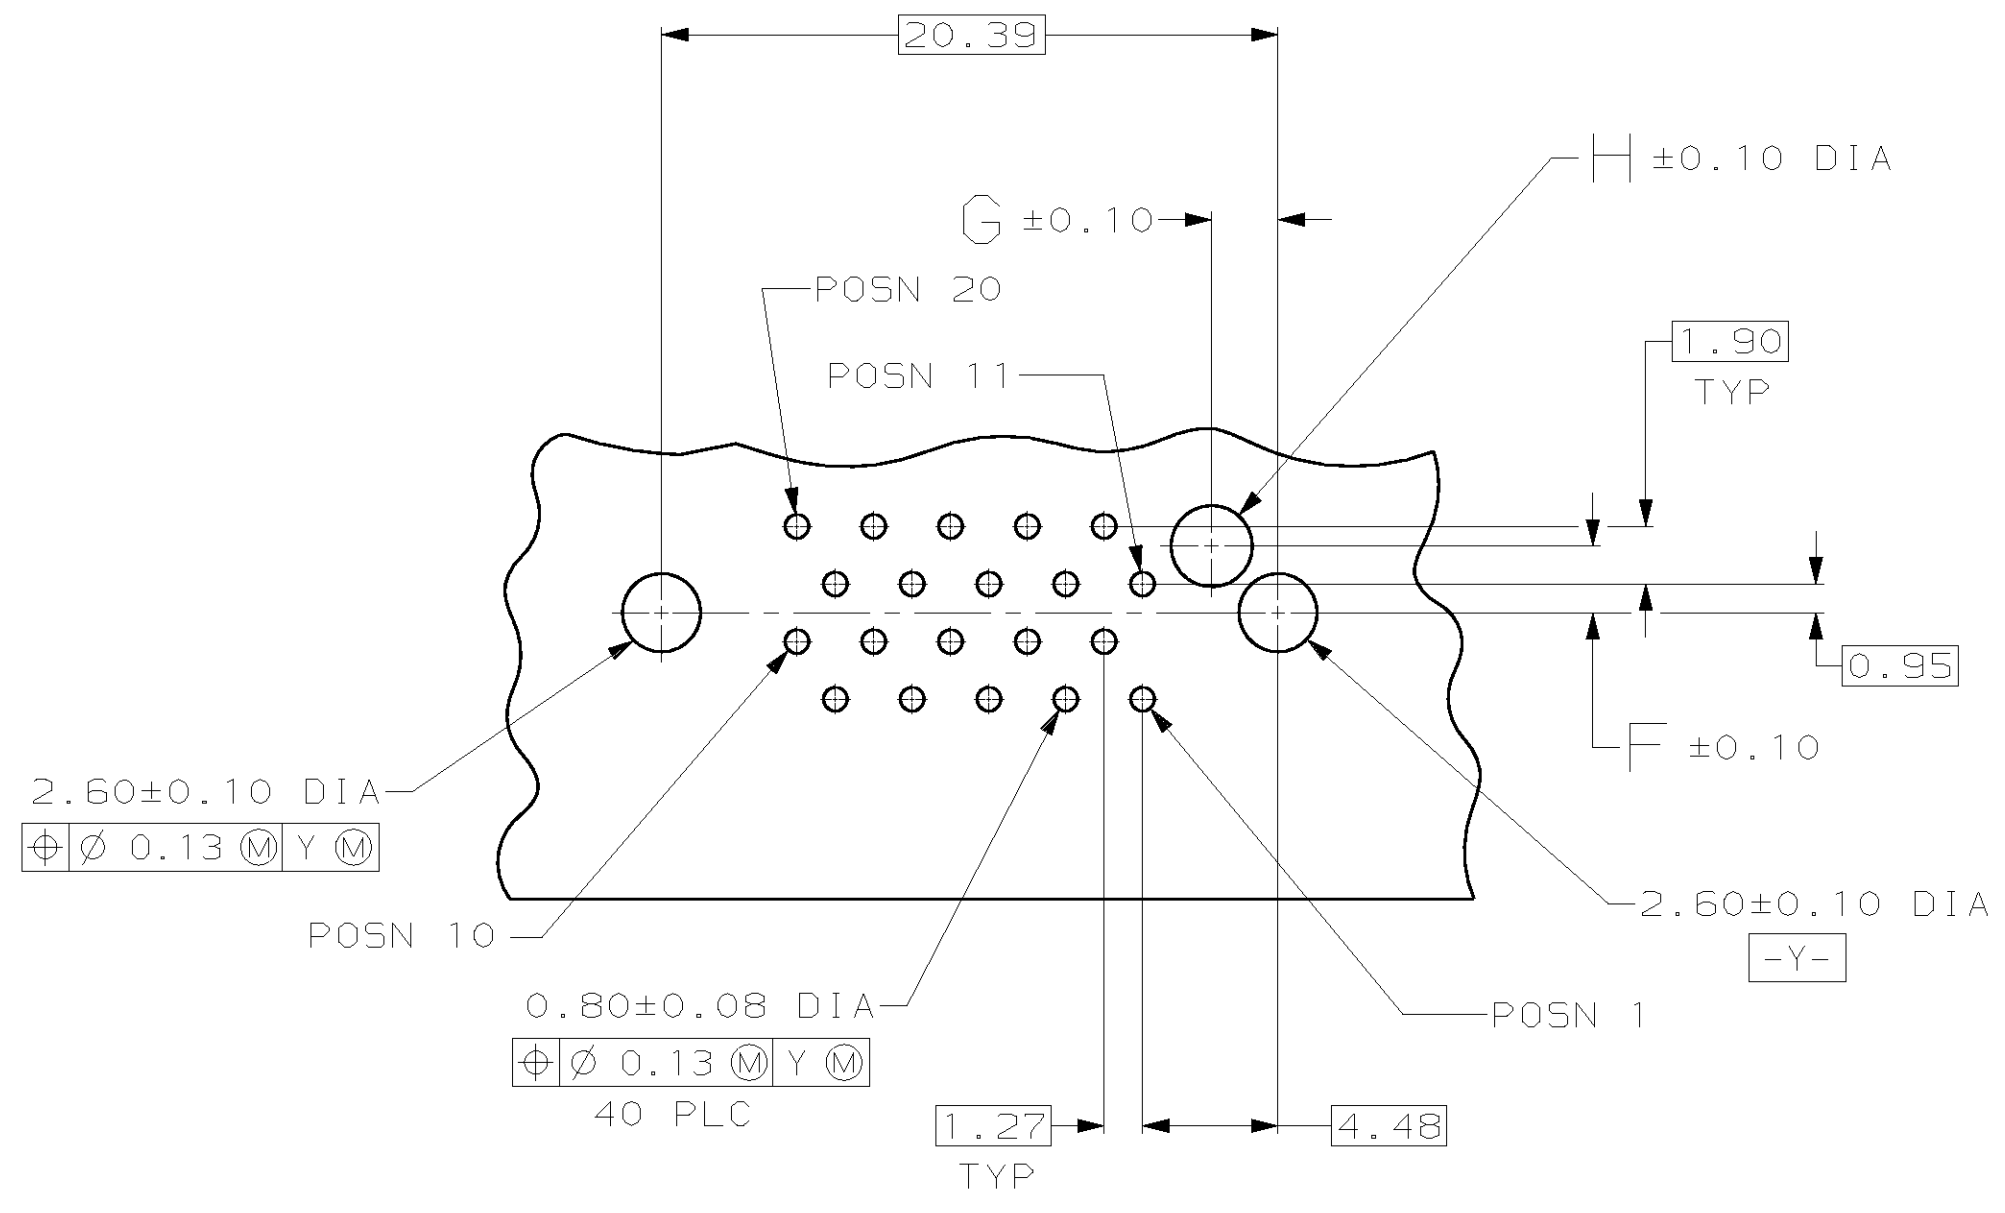
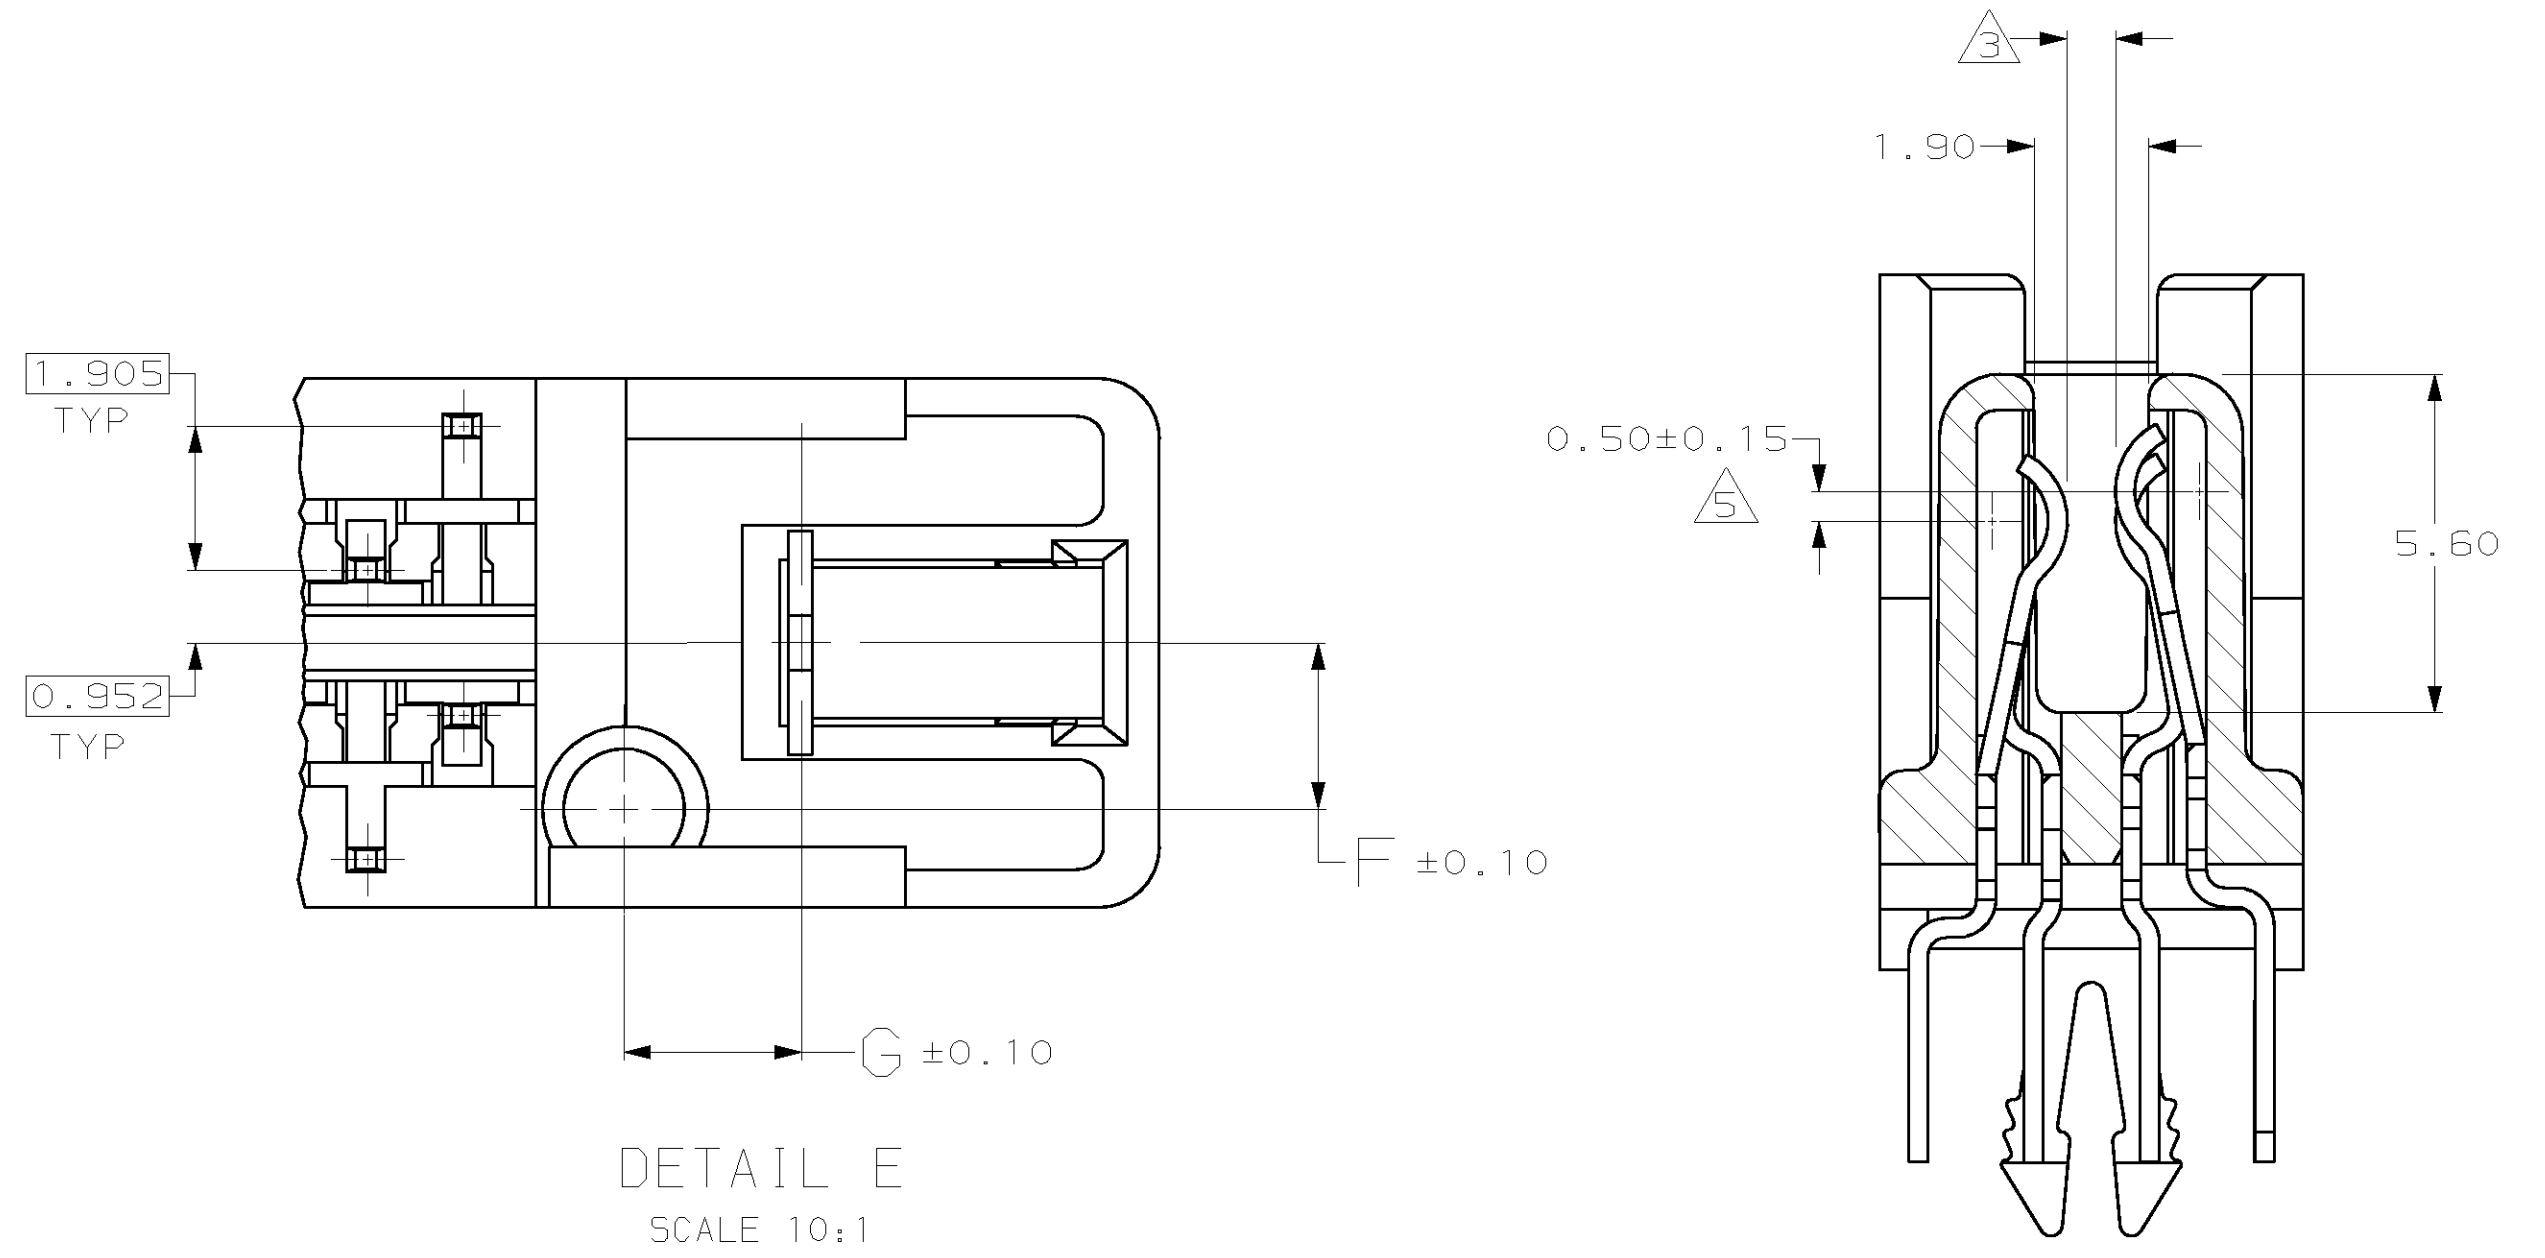


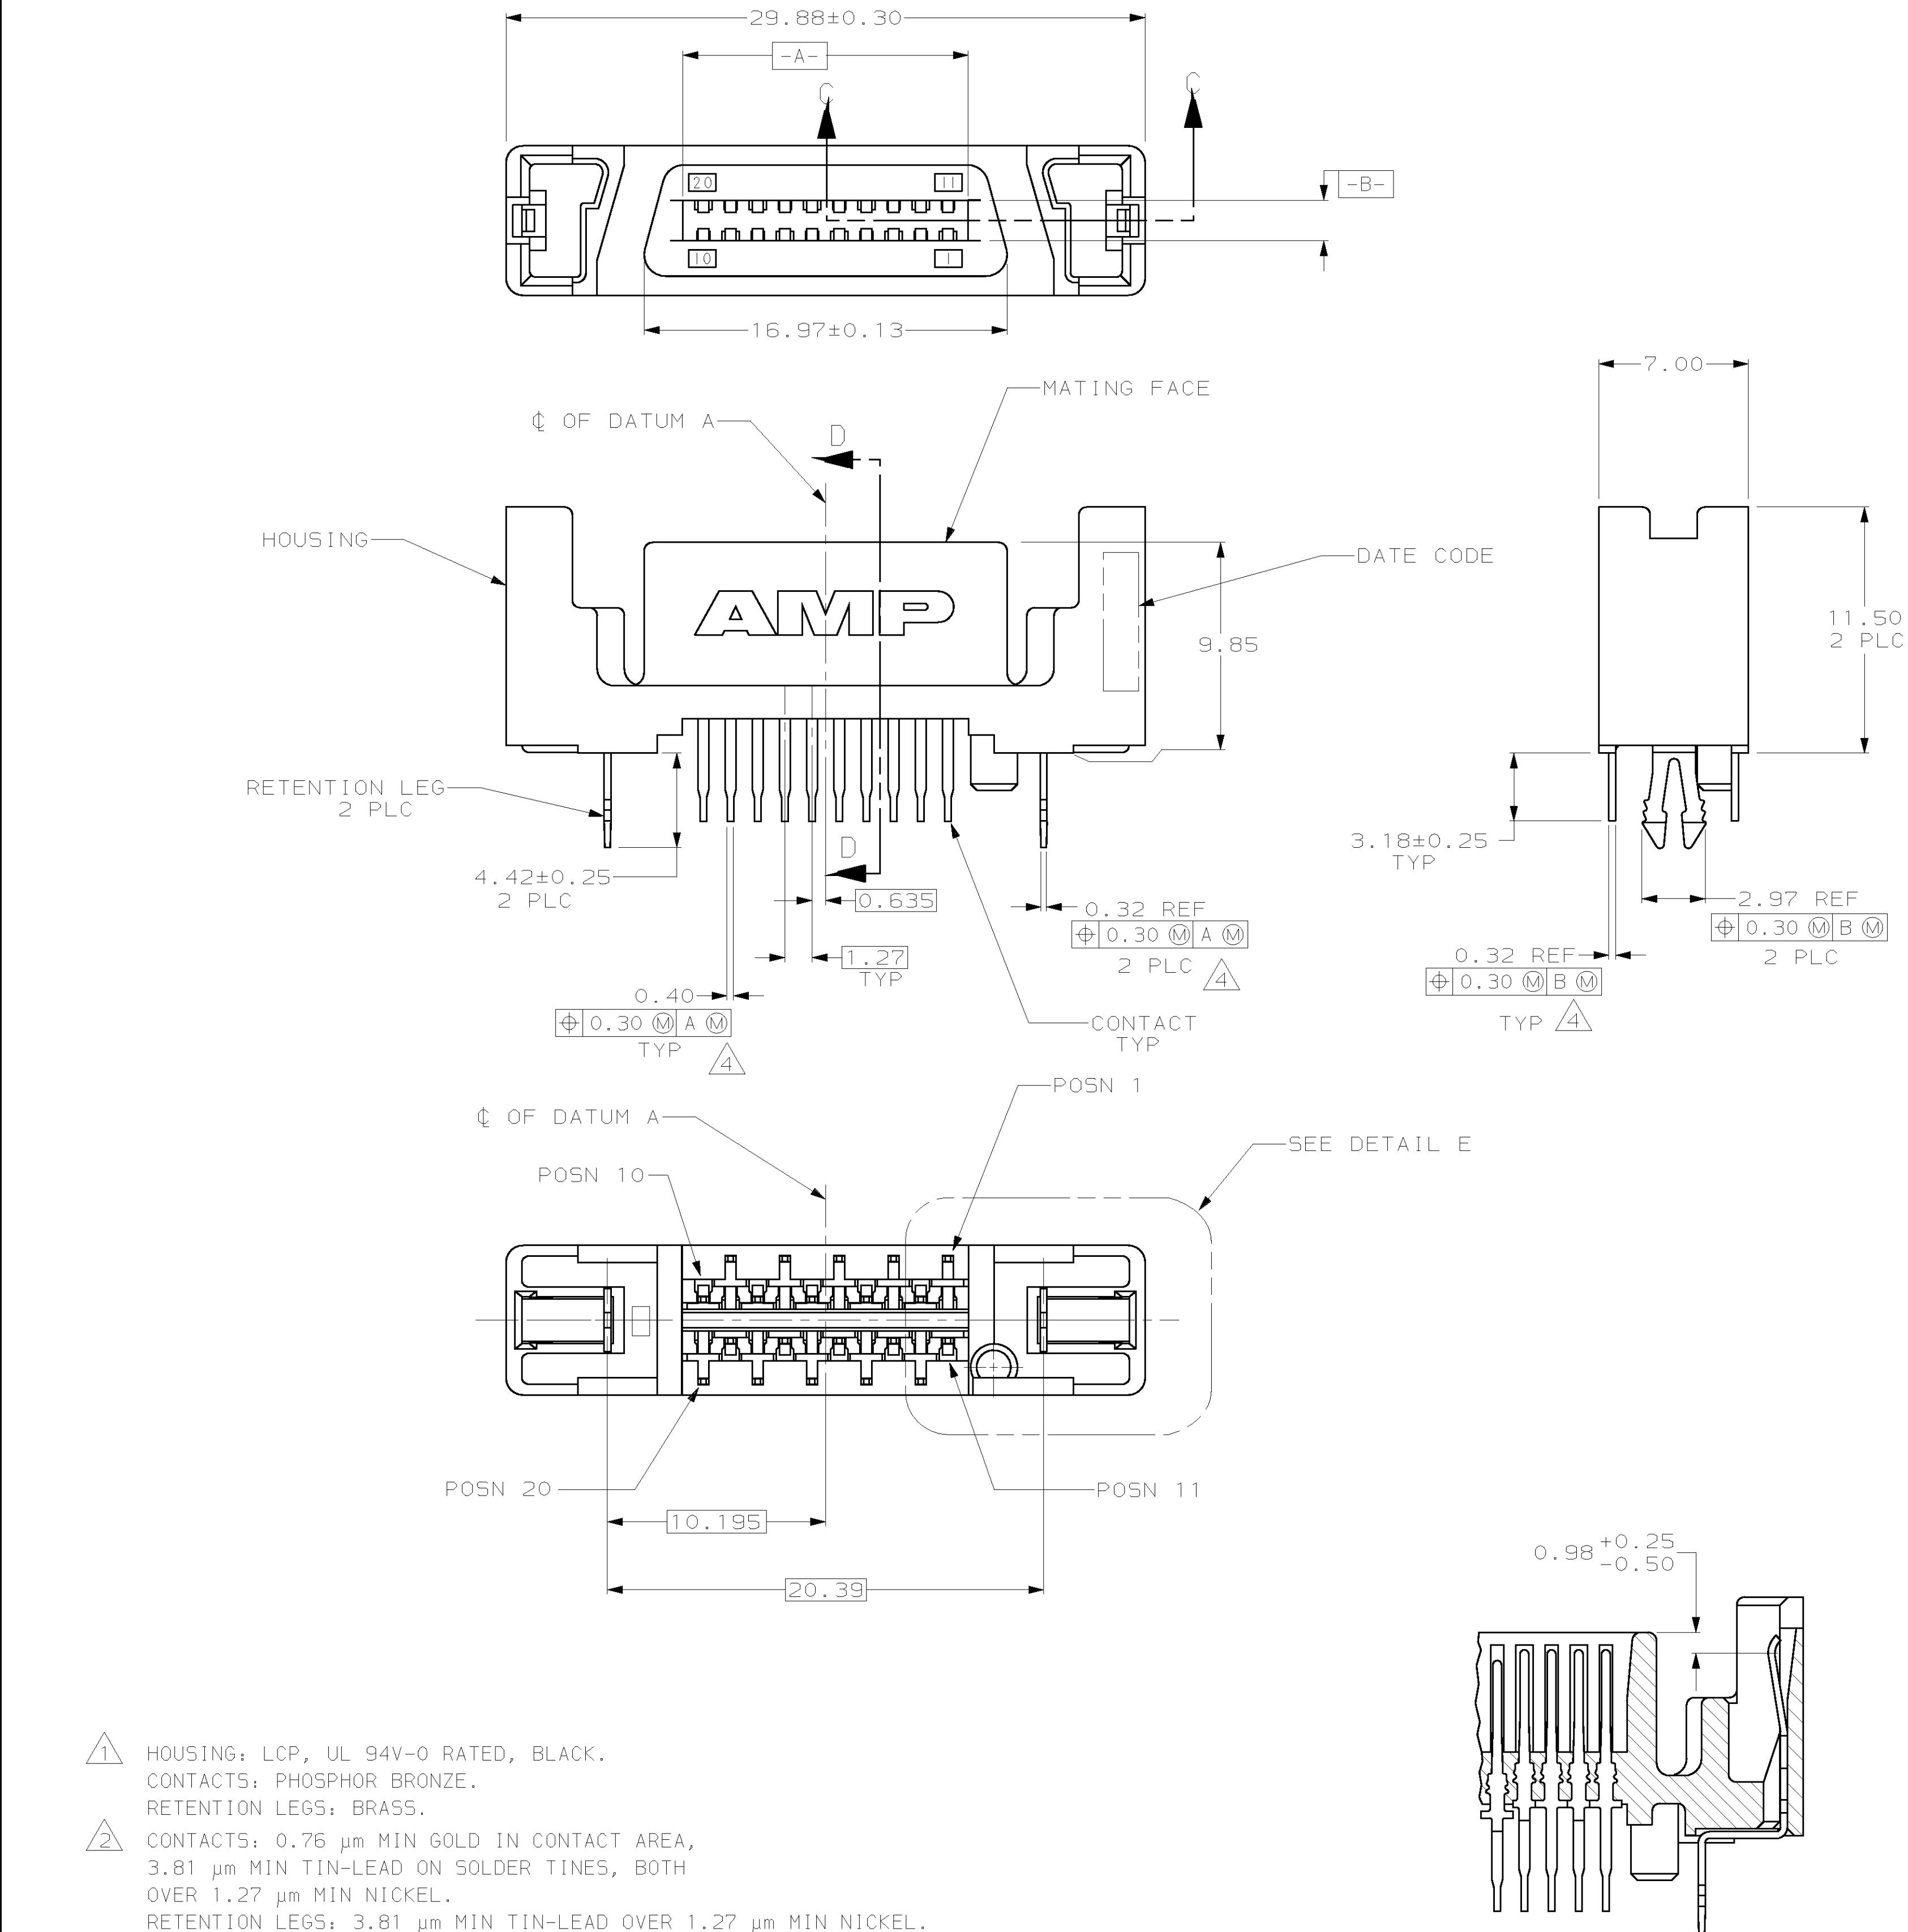

- 1 HOUSING: LCP, UL 94V-0 RATED, BLACK. CONTACTS: PHOSPHOR BRONZE. RETENTION LEGS: BRASS.
- 2 CONTACTS: 0.76 µm MIN GOLD IN CONTACT AREA, 3.81 µm MIN TIN-LEAD ON SOLDER TINES, BOTH OVER 1.27 µm MIN NICKEL. RETENTION LEGS: 3.81 µm MIN TIN-LEAD OVER 1.27 µm MIN NICKEL.
- 3 CONNECTOR WILL ACCOMMODATE MATING PRINTED CIRCUIT BOARD OF 1.60±0.07 THICKNESS.
- 4 POSITION TOLERANCE APPLIES AT CONTACT TIP ONLY.
- 5 CONTACTS 1-10,15,16 ARE POSITIONED AWAY FROM MATING FACE (SECOND MATE). CONTACTS 11-14 AND 17-20 ARE POSITIONED TOWARD MATING FACE (FIRST MATE).
- 6 CONTACTS: 0.76 µm MIN GOLD IN CONTACT AREA, 3.81 µm MIN MATTE TIN ON SOLDER TINES, BOTH OVER 1.27 µm MIN NICKEL. RETENTION LEGS: 3.81 µm MIN HALT TIN.

SECTION C-C

6	-	-	-	787646-4
6	2.60	2.19	2.20	787646-3
2	-	-	-	787646-2
2	2.60	2.19	2.20	787646-1
FINISH	H	G	F	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHALL BE CONTACTED FOR THE LATEST REVISION.		OWN D. BROCKWAY 11-22-95	AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK C. DORWART 11-28-95	NAME J. SWANK 11-30-95	
TOLERANCES UNLESS OTHERWISE SPECIFIED: mm		PRODUCT SPEC APPLICATION SPEC 114-6061		
MATERIAL SEE TABLE		WEIGHT -	SIZE A1	CAGE CODE 00779
		DRAWING NO 787646		
		CUSTOMER DRAWING		
		SCALE 5:1		
		SHEET 1 OF 1		
		REV D		